

Experimental study of low-carbon fuel injection and combustion in marine engines

Introduction

Ambitious goals of the International Maritime Organization envision a decarbonization of the international shipping industry until 2050. New synthetic fuels such as Ammonia (NH_3) and Methanol (CH_3OH) are promising options to reduce greenhouse-gas emissions from marine internal combustion engines. Their thermophysical properties deviate strong from conventional compression ignition fuels resulting in slow reaction kinetics. These can be improved by dual fuel injection strategies, injecting small amounts of high reactive fuels as ignition and combustion promotion.

Primary objective

Identify and determine injection parameters supporting a retrofit of current marine engines with low-carbon NH_3 and CH_3OH .

Secondary objectives

- Characterize experimentally the dual fuel combustion of $\text{NH}_3/\text{CH}_3\text{OH}$ (main injection) and various ignition promoters (pilot injections) in a constant volume combustion chamber.
- Identify the maximum practical NH_3 and CH_3OH energy share for various pilot fuels to reduce ignition time and increase reliability of combustion.
- Determine the best injection timings and spray interaction between main and pilot injections.

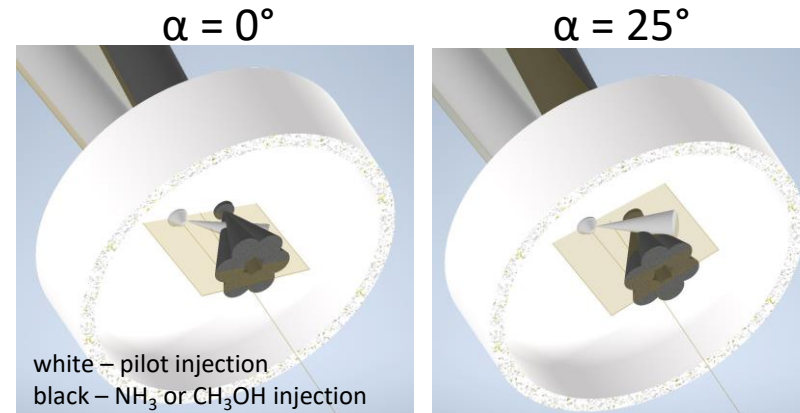


Fig.1: Spatial plume interaction controlled by pilot injector rotation α .

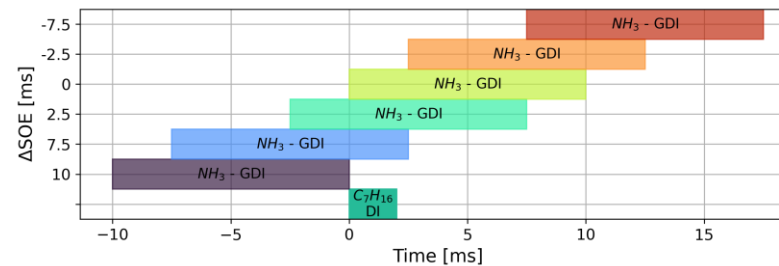


Fig.2: Temporal plume interaction ΔSOE – relative start of injection exemplary for ammonia main and heptane pilot.


David Zilles

Affiliation: NTNU, Institutt for marin teknikk (IMT)

Master of Science degree in Automotive Engineering from TU Ilmenau, Germany. Specialization in internal combustion engines development and production.

Member of the ComKin work group at EPT, NTNU and HySchool.

Passion for green shift in industry, experimental design, Norwegian friluftsliv, road cycling and running.

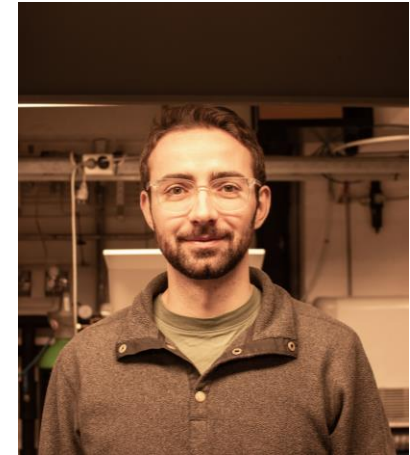

Estimated progress of the PhD project:



Publications

Oftedahl, Live; Zilles David. (2023) Flytende ammoniakk og methanol kan bli fremtidens drivstoff. (Blog entry)